

# Network Structure


NETWORK ANALYSIS IN R



**James Curley**

Associate Professor, University of Texas  
at Austin

# Eigenvector centrality

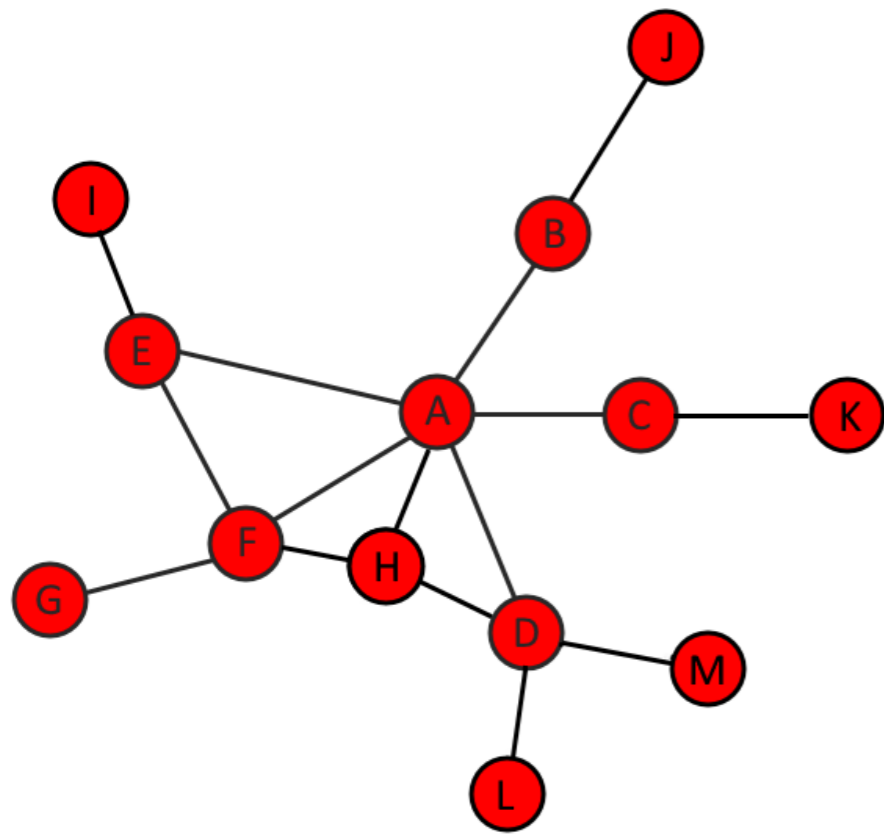


```
eigen_centrality(g)$vector
```


```
  A    B    C    D    E    F    G  
1.00 0.33 0.33 0.63 0.58 0.76 0.23  
  
  H    I    J    K    L    M  
0.71 0.17 0.10 0.10 0.19 0.19
```

# Density

density = 0.19  
edges = 15  
vertices = 13

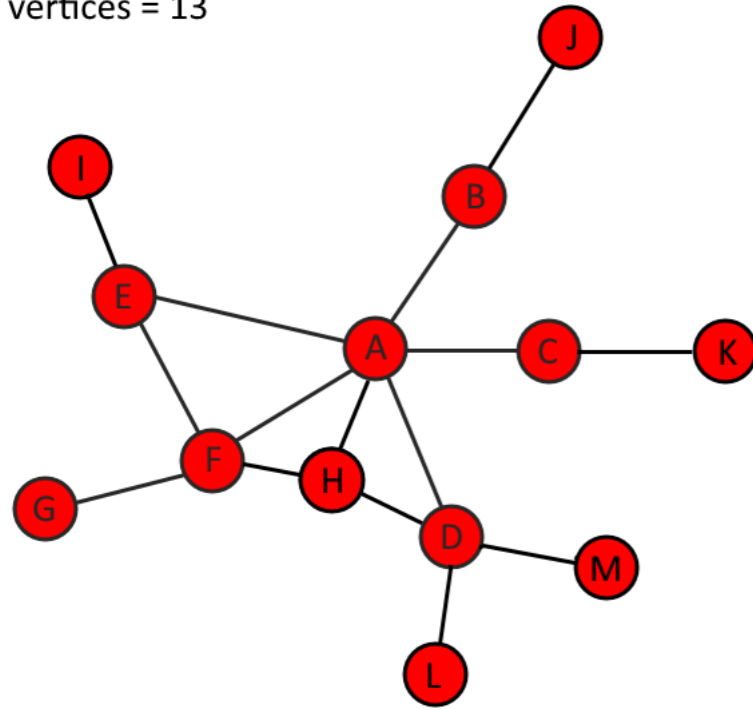


density = 0.38  
edges = 30  
vertices = 13

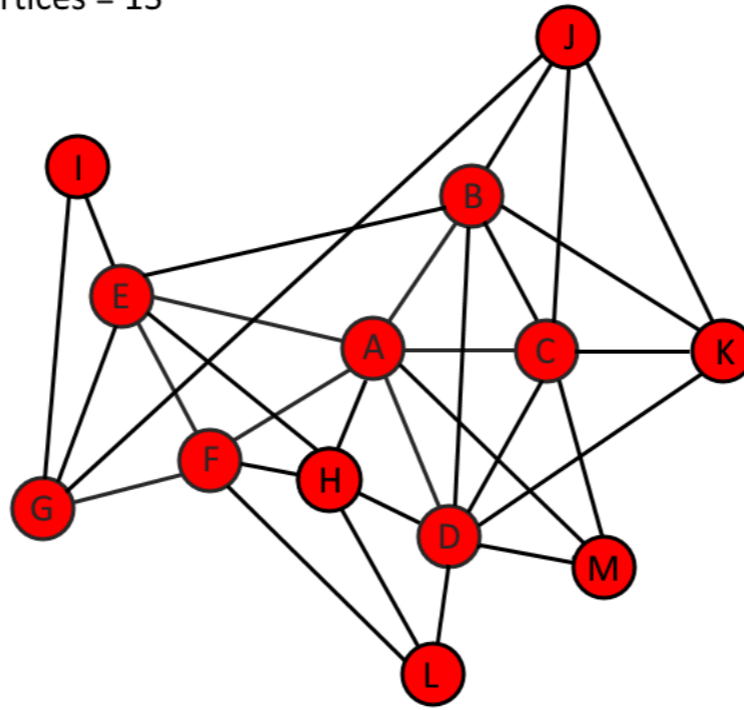


```
edge_density(g)
```

# Average path length

average path length = 2.47

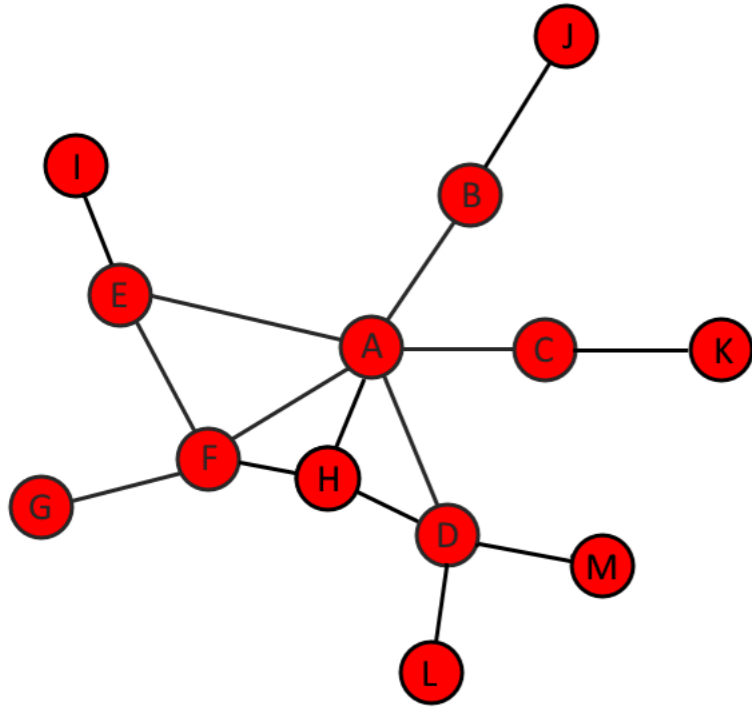

average path length = 1.81

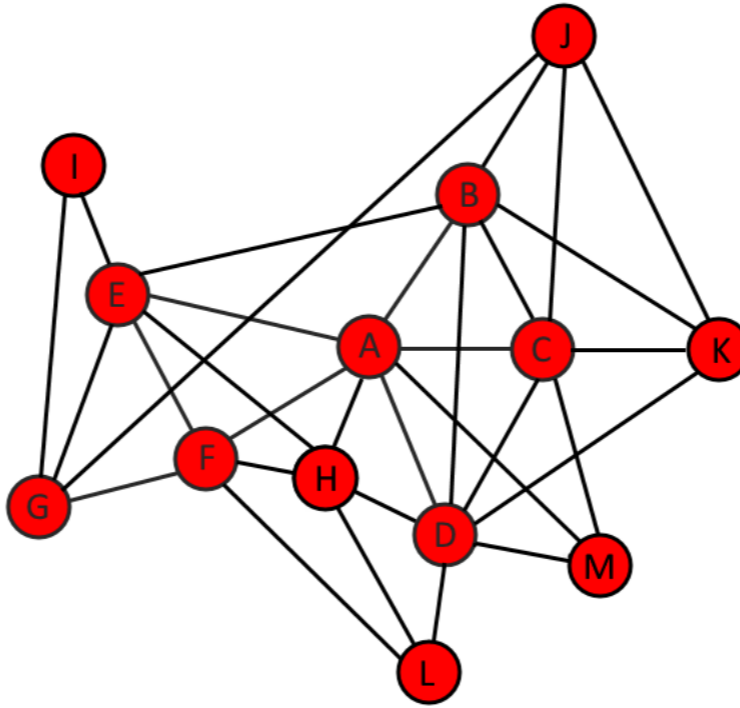

```
mean_distance(g, directed = FALSE)
```

# Let's practice!

NETWORK ANALYSIS IN R

# Network Randomizations

NETWORK ANALYSIS IN R




**James Curley**


Associate Professor, University of Texas  
at Austin

# Random graphs

density = 0.19  
vertices = 13

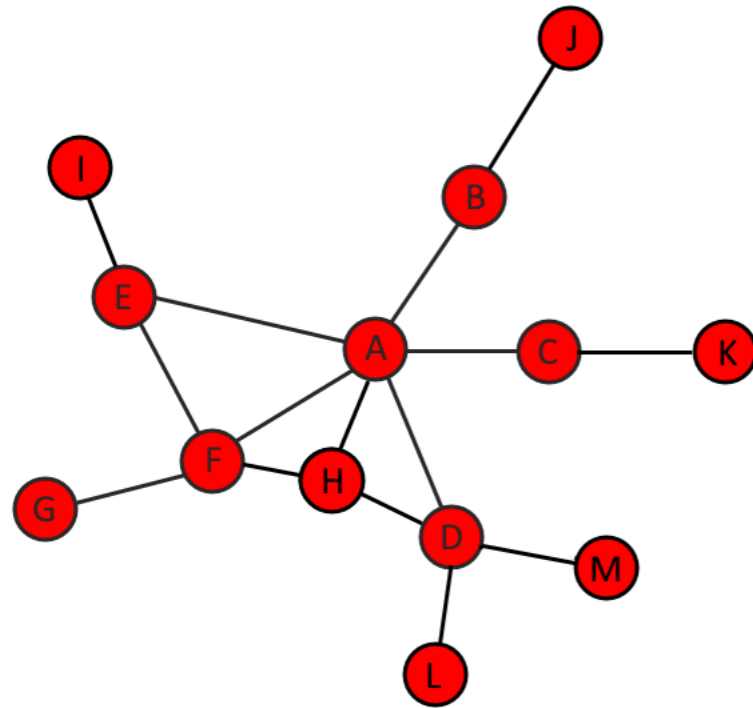

density = 0.21  
vertices = 13

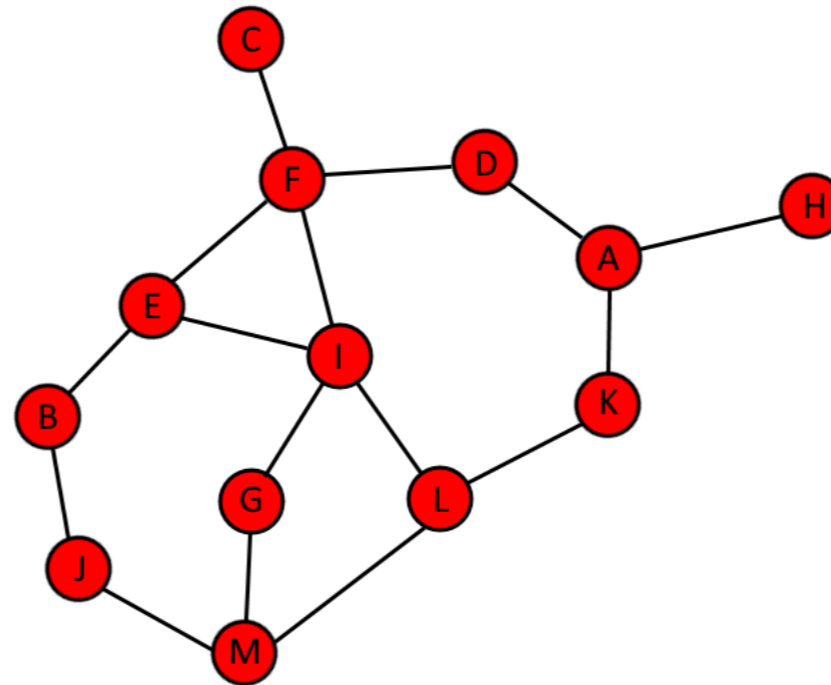

```
erdos.renyi.game(n = gorder(g), p.or.m = edge_density(g), type = "gnp")
```

# Random graphs & randomization tests

1. Generate 1000 random graphs based on the original network  
- e.g. with the same number of vertices and approximate density.
2. Calculate the average path length of the original network.
3. Calculate the average path length of the 1000 random networks.
4. Determine how many random networks have an average path length greater or less than the original network's average path length.



## Generate 1000 random graphs:

```
gl <- vector('list', 1000)

for(i in 1:1000){
  gl[[i]] <- erdos.renyi.game(
    n = gorder(g),
    p.or.m = edge_density(g),
    type = "gnp"
  )
}
```


## Calculate average path length of 1000 random graphs:

```
gl.apls <- unlist(
  lapply(gl, mean_distance, directed = FALSE)
)
```

# Comparing to the original network

```
hist(gl.apls, breaks = 20)

abline(
  v = mean_distance(
    g, directed=FALSE
  ),
  col = "red",
  lty = 3,
  lwd = 2
)
```

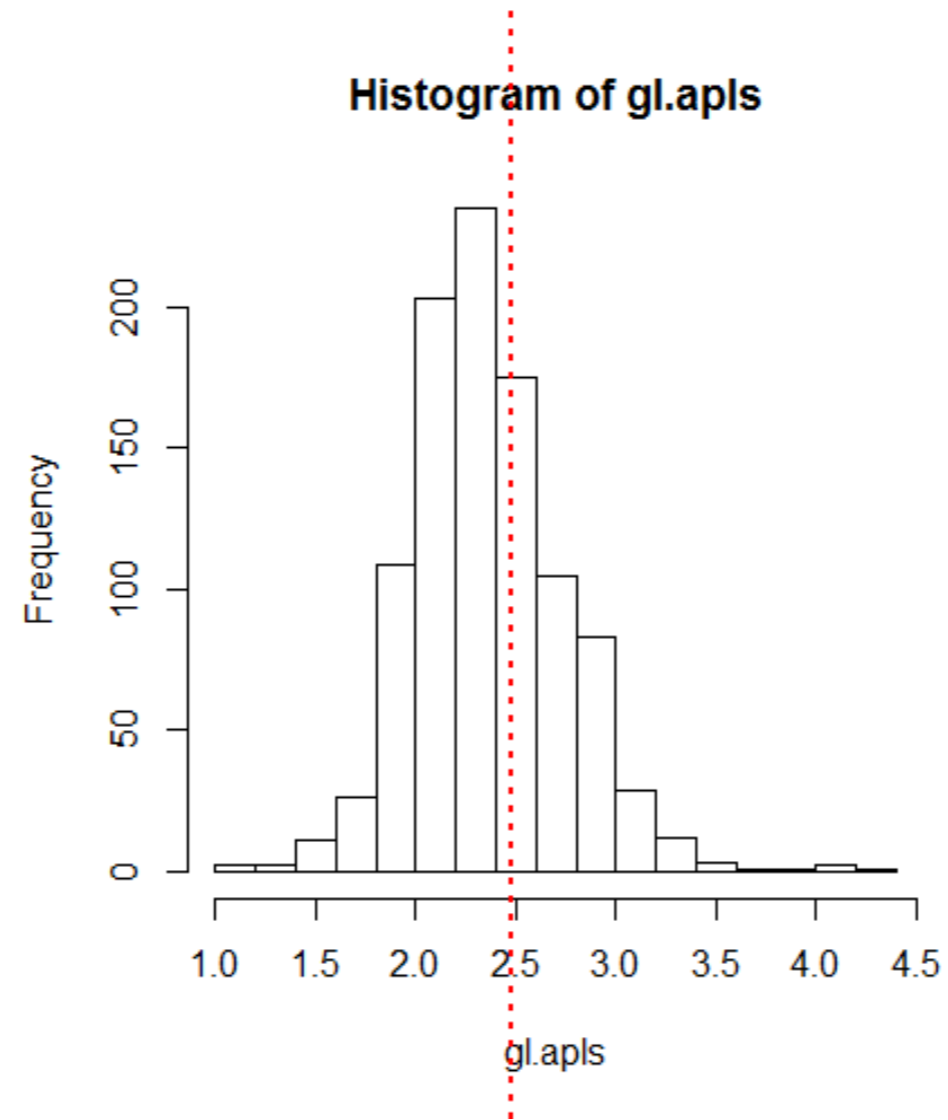

# Let's practice!

NETWORK ANALYSIS IN R

# Network substructures



NETWORK ANALYSIS IN R



**James Curley**


Associate Professor, University of Texas  
at Austin

# Transitivity

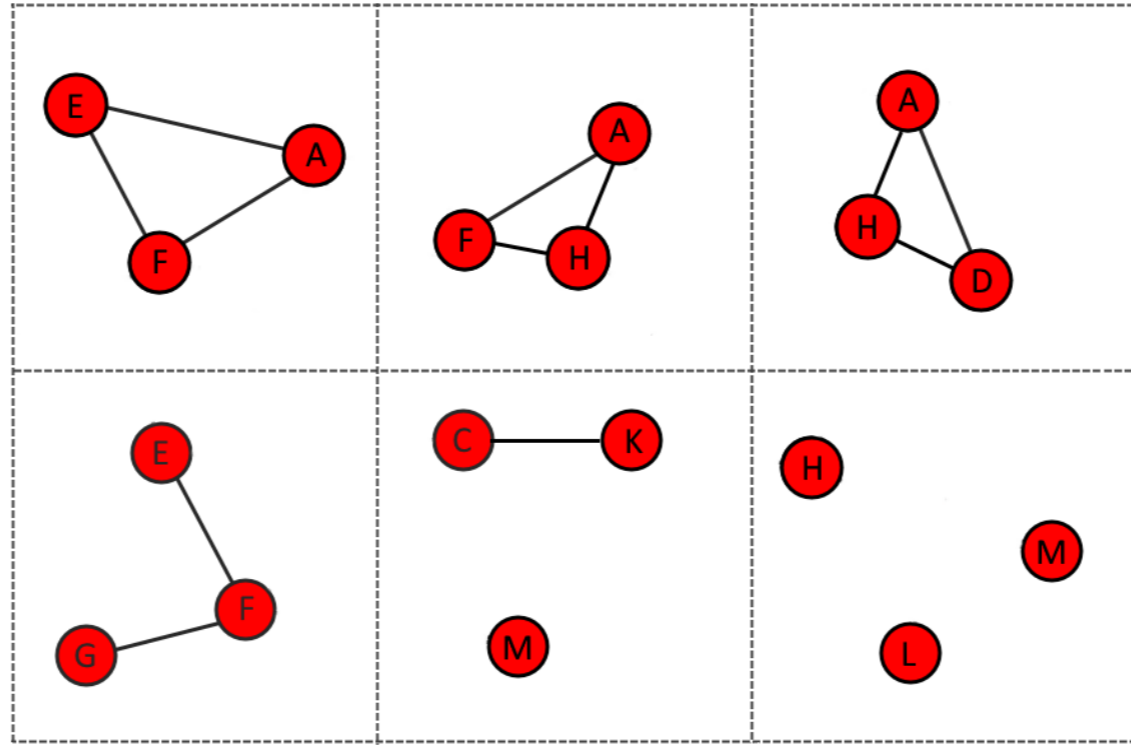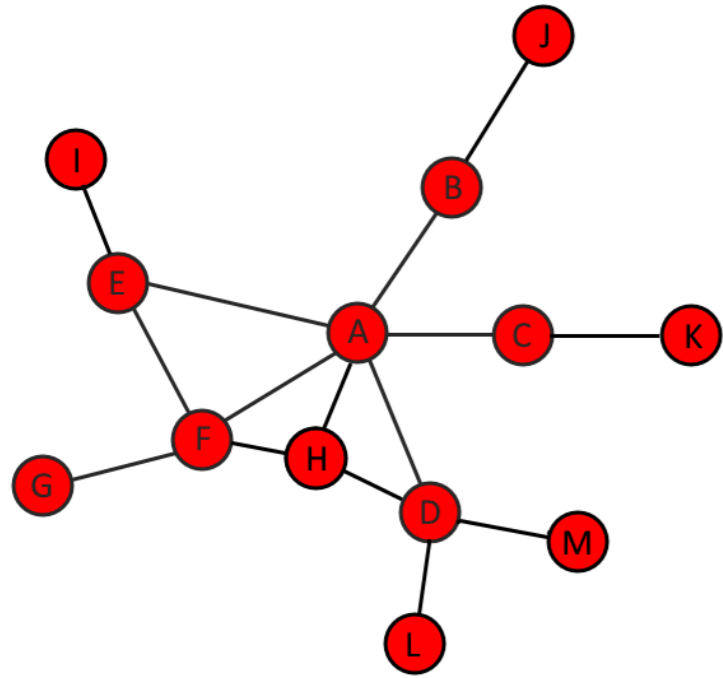

```
triangles(g)
```


# Global transitivity

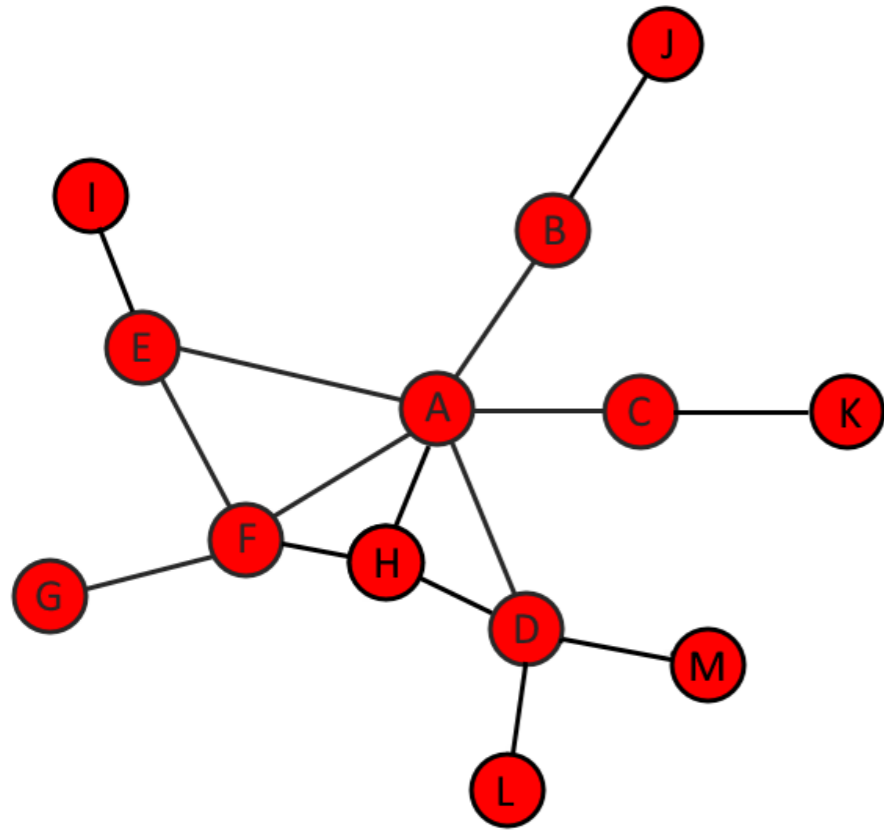

```
transitivity(g)
```

```
[1] 0.26
```

# Local transitivity

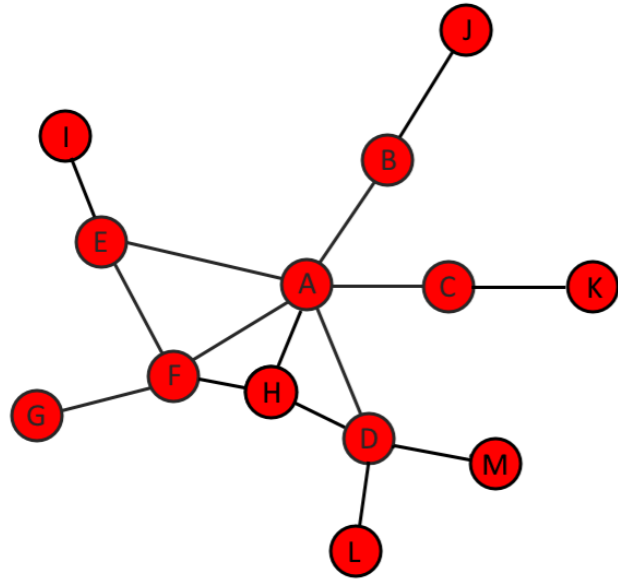

```
transitivity(g,  
  vids = 'A',  
  type = "local")
```

0.2

```
count_triangles(g, vids = 'A')
```

3



```
count_triangles(g, vids = 'F')
```

2

```
transitivity(g,  
  vids = 'F',  
  type = "local")
```

0.33

# Cliques

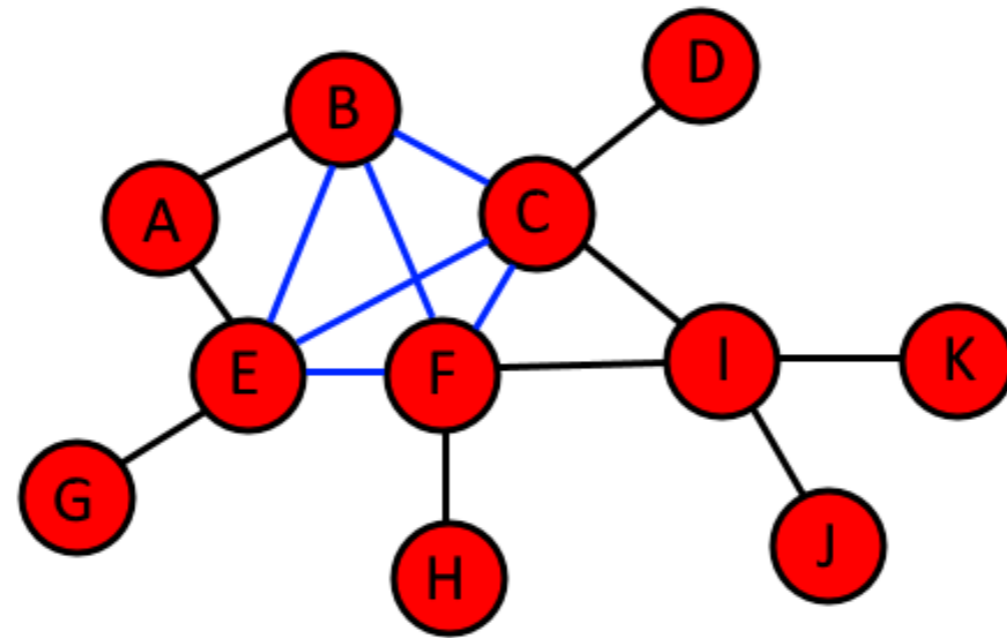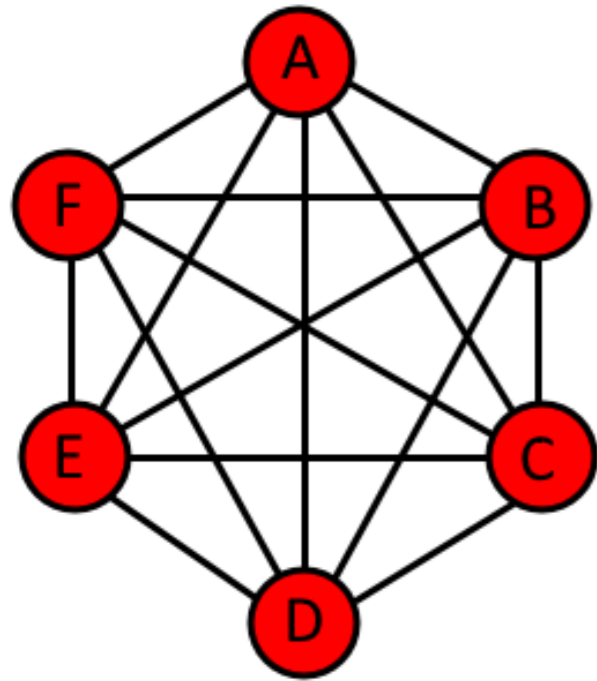




# Identifying cliques

```
largest_cliques(g)
```

```
+ 4/11 vertices, named:  
[1] C F B E
```

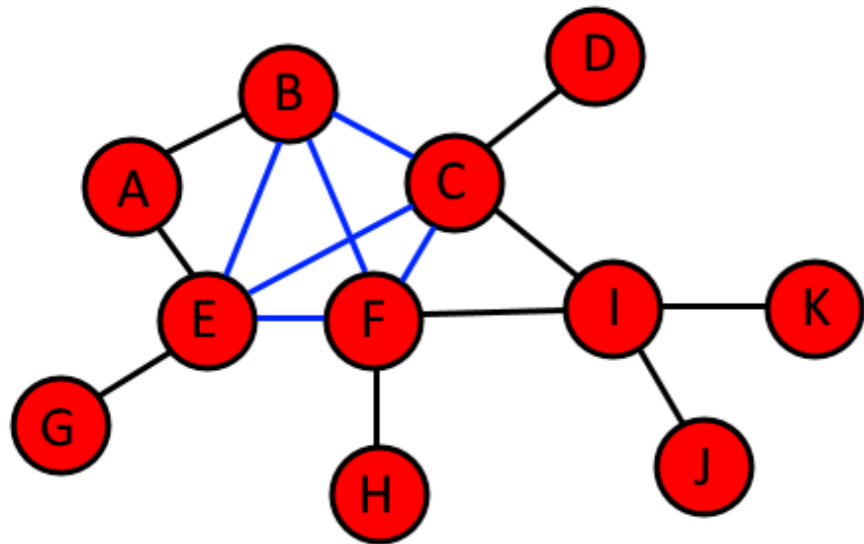

```
max_cliques(g)
```

```
...  
[[6]]  
+ 3/11 vertices, named:  
[1] A B E  
  
[[7]]  
+ 3/11 vertices, named:  
[1] I C F  
  
[[8]]  
+ 4/11 vertices, named:  
[1] E B F C
```

# Let's practice!

NETWORK ANALYSIS IN R