

Connection patterns


NETWORK ANALYSIS IN THE TIDYVERSE



Massimo Franceschet

Prof. of Data Science, University of
Udine (Italy)


The adjacency matrix (part 1)

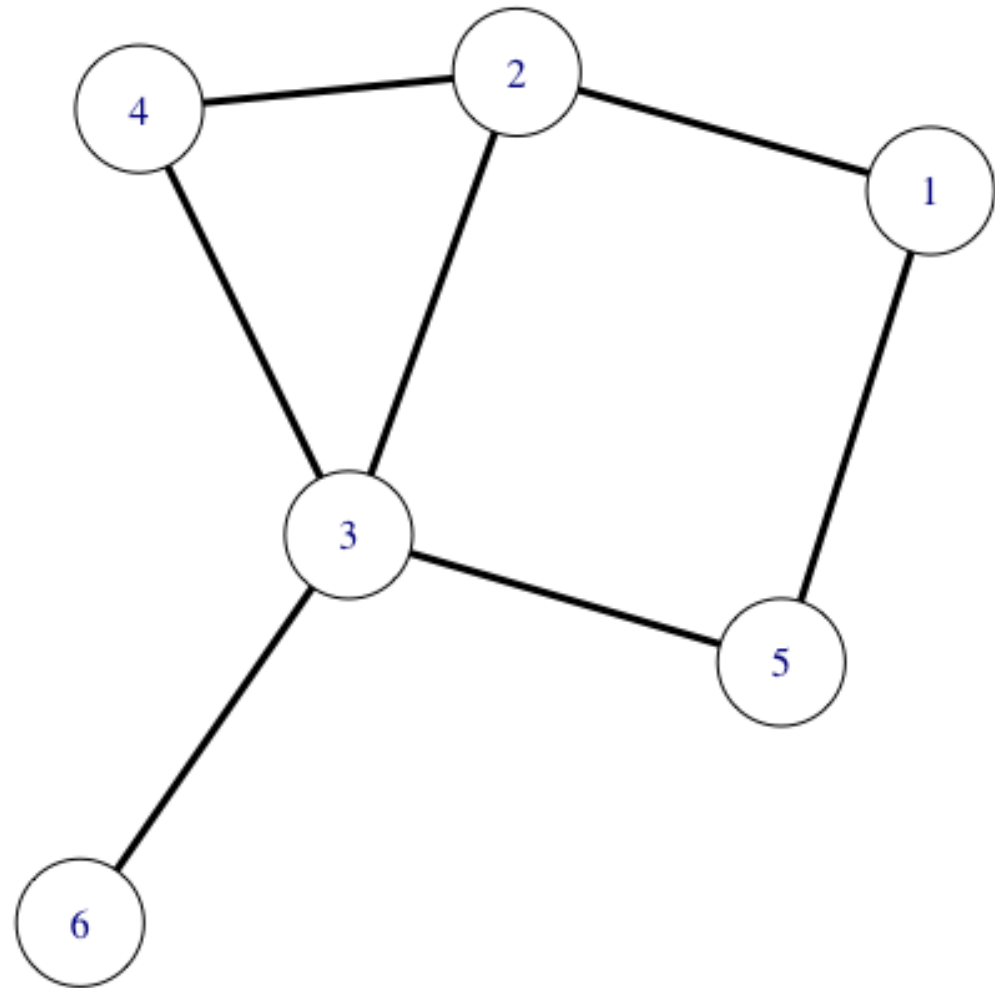

```
as_adjacency_matrix(g)
```

	1	2	3	4	5	6
1	0	1	0	0	1	0
2	1	0	1	1	0	0
3	0	1	0	1	1	1
4	0	1	1	0	0	0
5	1	0	1	0	0	0
6	0	0	1	0	0	0

The adjacency matrix (part 2)

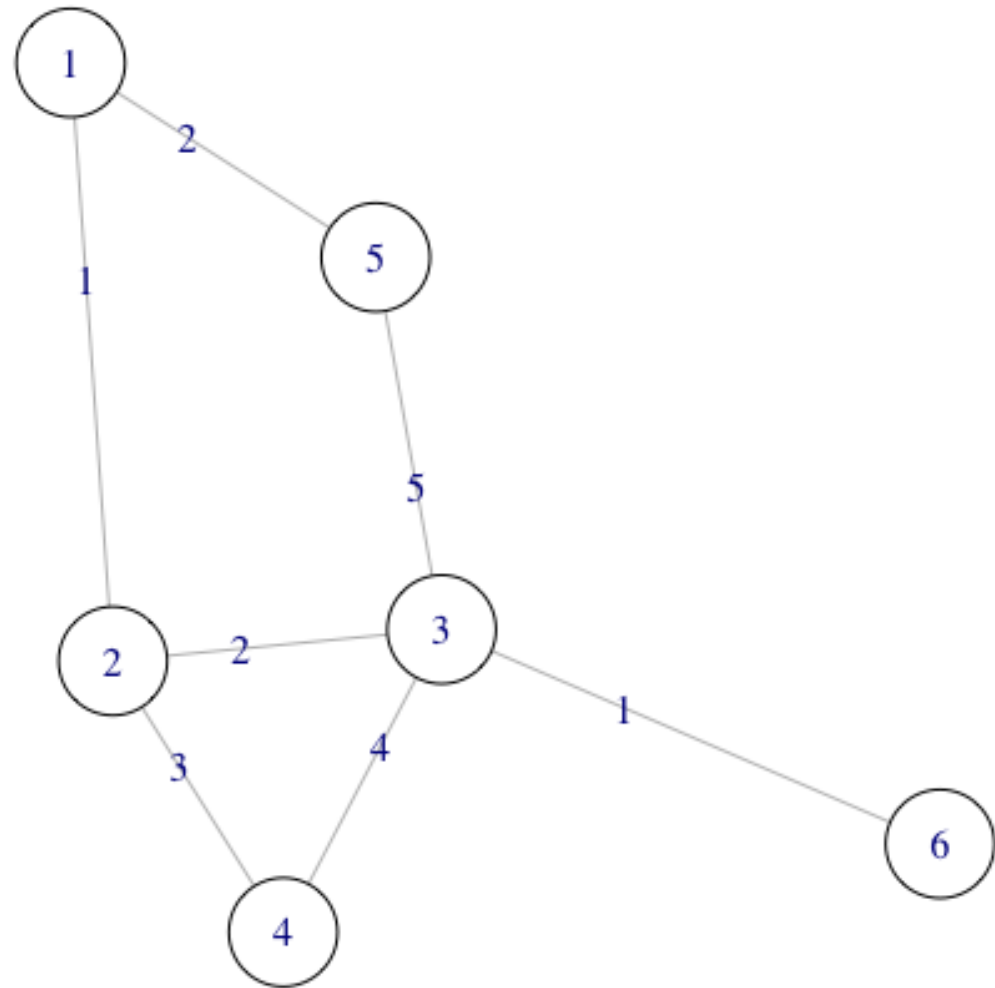

```
as_adjacency_matrix(g,  
  attr="weight")
```


	1	2	3	4	5	6
1	0	1	0	0	2	0
2	1	0	2	3	0	0
3	0	2	0	4	5	1
4	0	3	4	0	0	0
5	2	0	5	0	0	0
6	0	0	1	0	0	0

Working with adjacency matrices

```
# get the adjacency matrix of network g
A = as_adjacency_matrix(g)
# get the weighted adjacency matrix of weighted network g
A = as_adjacency_matrix(g, attr = "weight")
```

```
# first row of matrix A
A[1, ]
# first column of matrix A
A[, 1]
# diagonal of matrix A
diag(A)
```

Pearson similarity

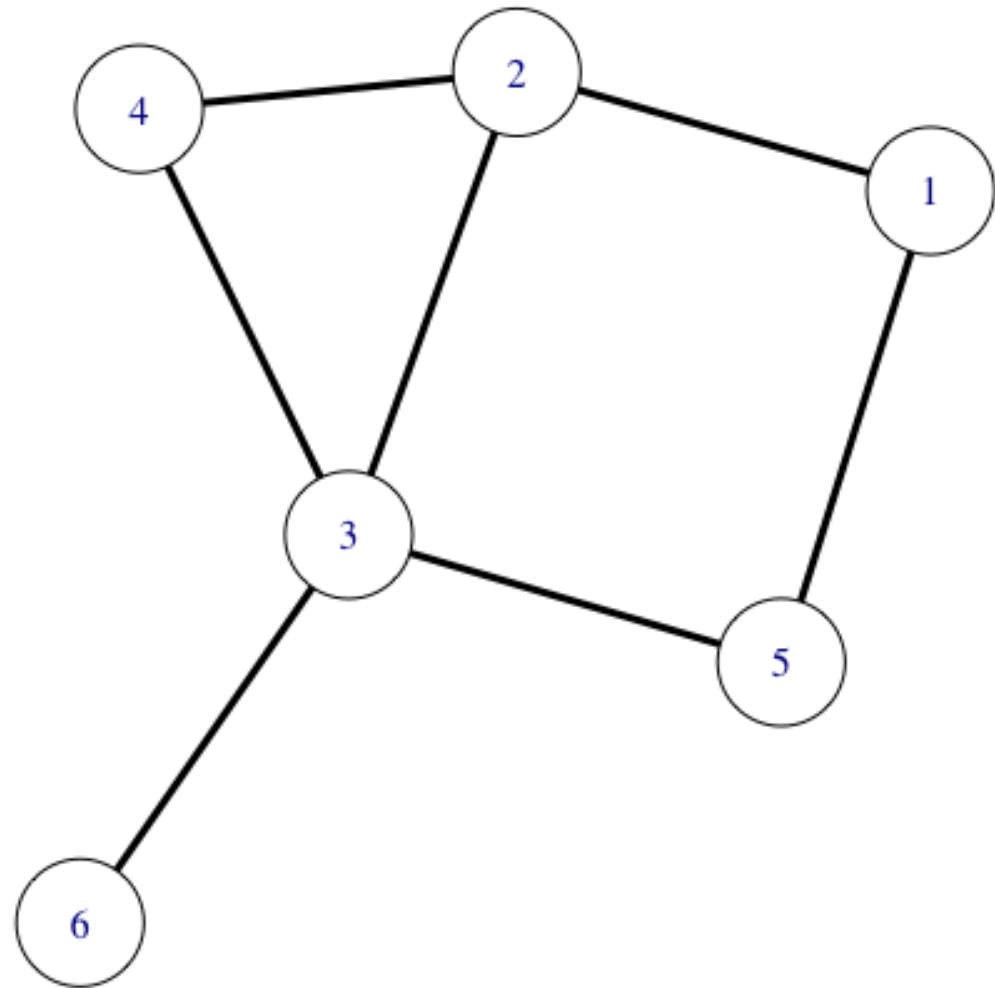

```
as_adjacency_matrix(g)
```

```
[ ,1] [ ,2] [ ,3] [ ,4] [ ,5] [ ,6]
[1, ] 0  1  0  0  1  0
[2, ] 1  0  1  1  0  0
[3, ] 0  1  0  1  1  1
[4, ] 0  1  1  0  0  0
[5, ] 1  0  1  0  0  0
[6, ] 0  0  1  0  0  0
```

**Let's try some
examples!**

NETWORK ANALYSIS IN THE TIDYVERSE

Pearson similarity

NETWORK ANALYSIS IN THE TIDYVERSE




Massimo Franceschet

Prof. of Data Science, University of
Udine (Italy)

Visualizing correlation

```
# scatterplot of degree and strength  
ggplot(data = nodes, mapping = aes(x = degree, y = strength)) +  
  geom_point() +  
  geom_smooth(method = "lm", se = FALSE)
```

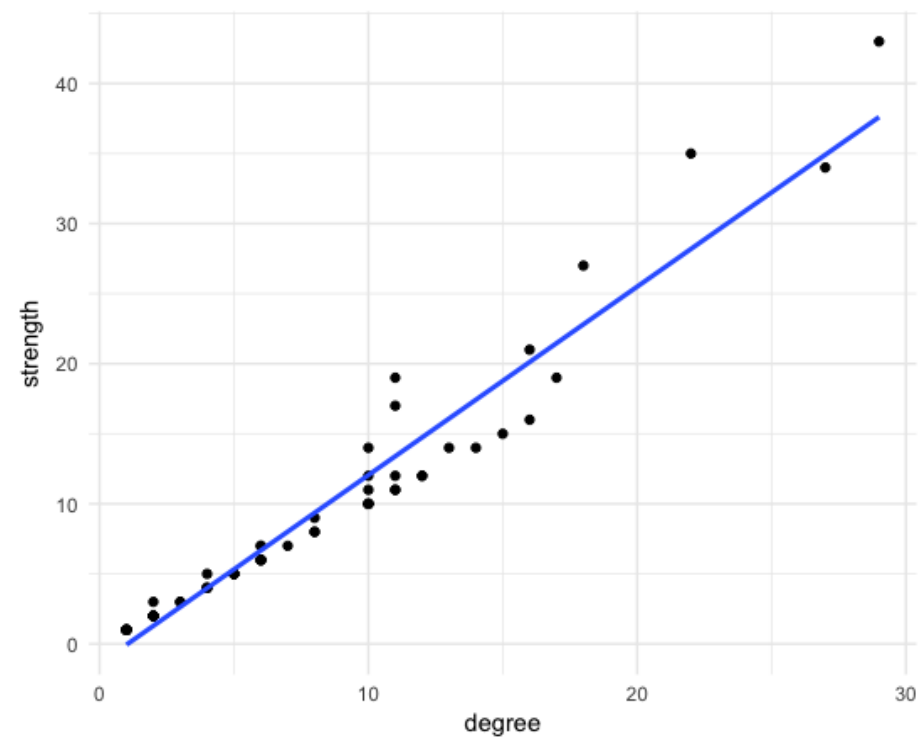

Computing correlation

- Positive values indicate positive correlation
- Negative values indicate negative correlation
- Null values indicate no correlation

```
# Pearson correlation coefficient  
cor(nodes$degree, nodes$strength)
```

```
0.9708946
```

Let's practice!

NETWORK ANALYSIS IN THE TIDYVERSE


Most similar and most dissimilar nodes

NETWORK ANALYSIS IN THE TIDYVERSE




Massimo Franceschet

Prof. of Data Science, University of
Udine (Italy)

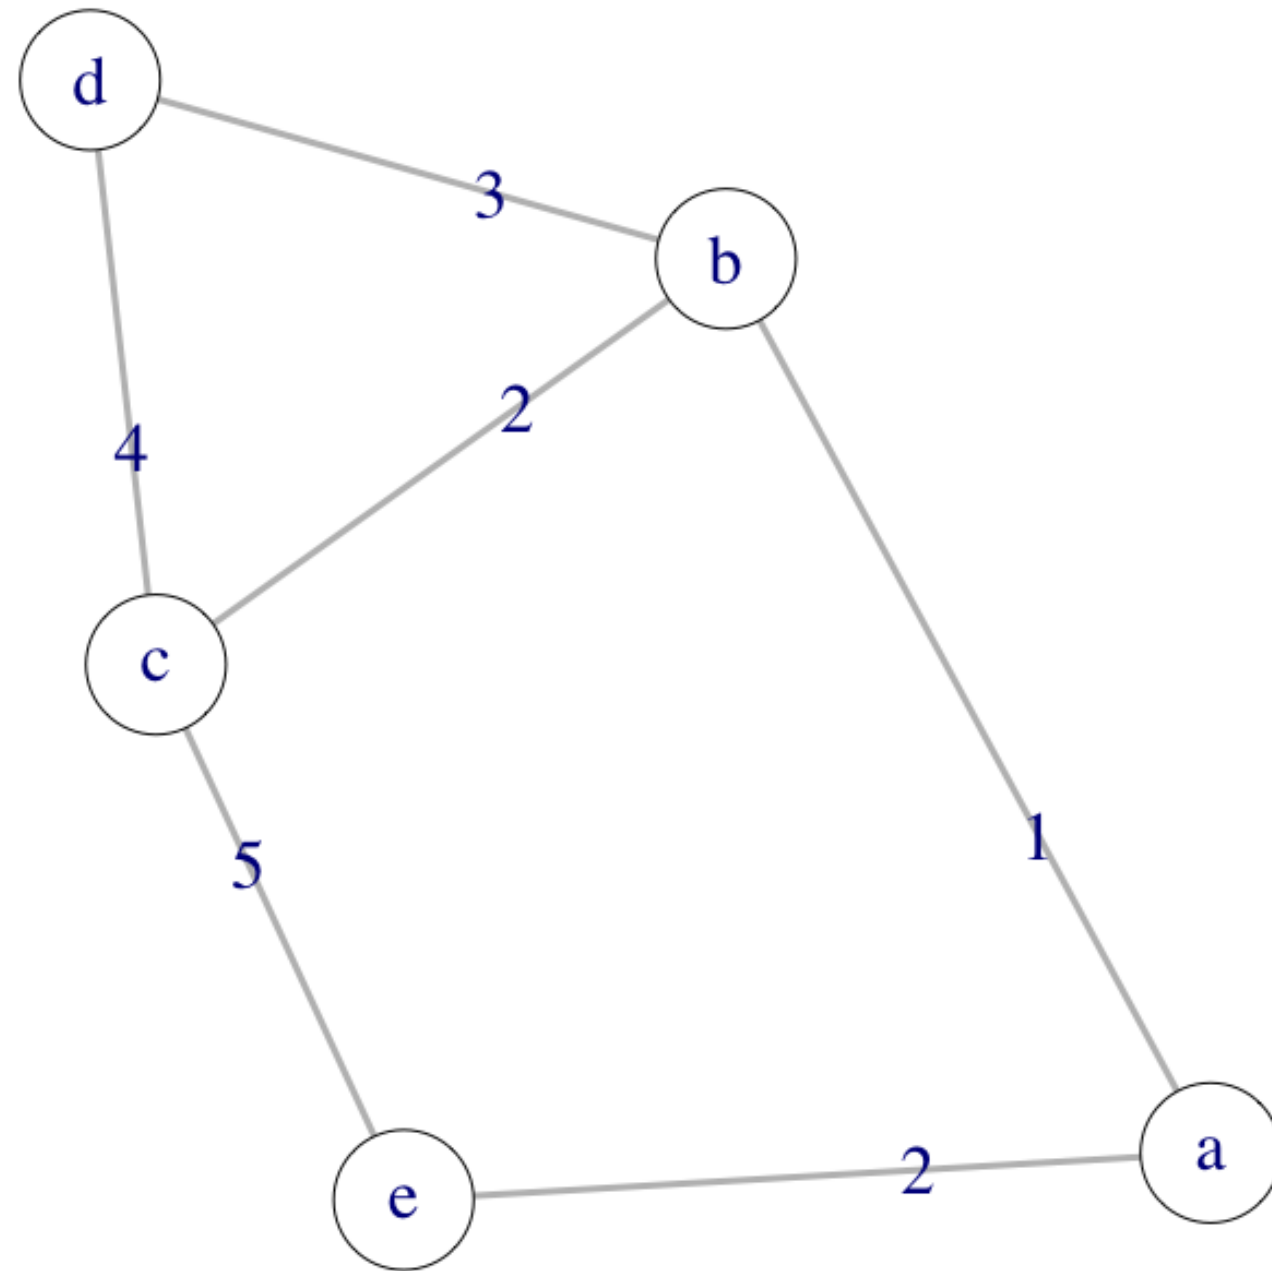

A network as a matrix

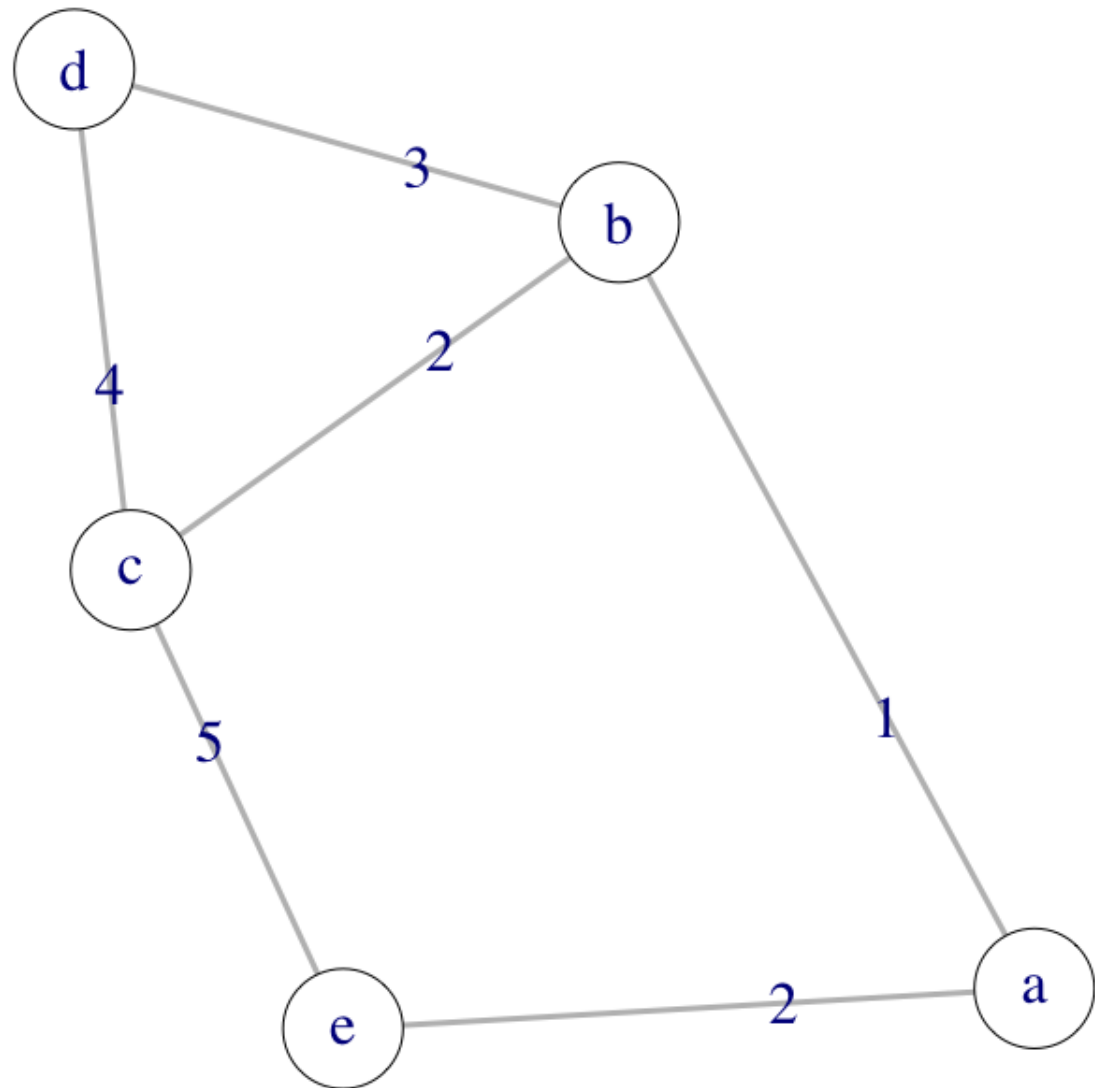

```
as_adjacency_matrix(g,  
  attr = "weight")
```

	a	b	c	d	e
a	0	1	0	0	2
b	1	0	2	3	0
c	0	2	0	4	5
d	0	3	4	0	0
e	2	0	5	0	0

A network as a data frame

```
as_data_frame(g, what = "both")
```

```
$nodes
  name
a     a
b     b
c     c
d     d
e     e
```

```
$ties
  from to weight
1    a  b     1
2    a  e     2
3    b  c     2
4    b  d     3
5    c  d     4
6    c  e     5
```

Mapping representations

```
# graph to matrix
A <- as_adjacency_matrix(g)

# matrix to graph
g <- graph_from_adjacency_matrix(A)
# graph to data frame
df = as_data_frame(g, what = "both")

# data frame to graph
g <- graph_from_data_frame(df$ties, vertices = df$nodes)
# matrix to data frame
df = as_data_frame(graph_from_adjacency_matrix(A), what = "both")

# data frame to matrix
A <- as_adjacency_matrix(graph_from_data_frame(df$ties,
  vertices = df$nodes))
```

**Let's try more
examples!**

NETWORK ANALYSIS IN THE TIDYVERSE